

MACLENNAN CWP 150-CLEAN WATER PUMP

DESCRIPTION

The MacLennan CWP150 is a medium head and low to medium performance pump. The CWP150 is an automatic pump, with integral vertical float switch and so is not suitable for use with our pump control panels.

It is suitable for use with MacLennan Power Converters of 1200W or over to give continual pumping even when the power is out.


The CWP150 is supplied with a one way check valve and is suitable for 40mm or 50mm discharge pipe.

The Clean Water Pump is sold as pump only, or as a key component in our MacLennan Hydrosump-Pro and MacLennan Hydrosump packaged pump systems.

For further information please contact our Technical Department.



TECHNICAL DATA

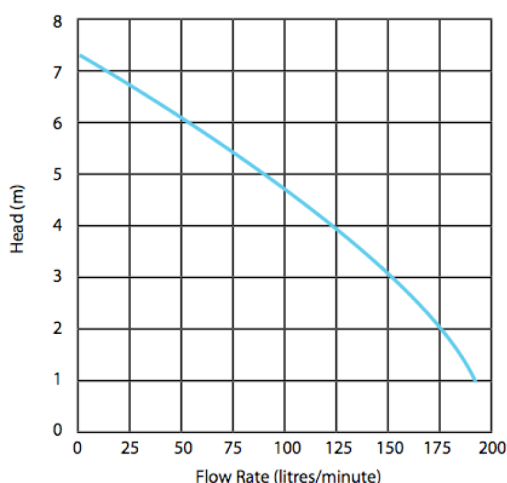

Pump Design Semi-vortex

Discharge Bore Pump 32mm (Max 50mm pipe)

Pumping Head (Max) 7.2m

Flow Rate (Max) 153 litres/minute

Flow Rate at 4m Head 100 litres/minute

Soft Solid Passage 7mm

Length 203mm

Width 177mm

Height 319mm

Lowest or Stop Water Level 81mm

Dry Weight 6.1kg

Fluid Suitability Rain water, ground water

Fluid Temperature Range 0 to 40 ° C

Motor Output 150W

Power Supply Single Phase

Starter Capacitor Type

Vortex Impellor Speed 3000 rpm

Body Material Stainless Steel and ABS Plastic

Shaft Material 403 Stainless Steel

Shaft Seals Double Silicon Carbide

Float Switch Vertical Mechanical